

// GRAVEL

# G3

GRAVEL



Built on the groundbreaking G3 platform, this complete gravel bike blends aerodynamic speed with all-terrain confidence. Every detail—from the integrated cockpit to the carbon wheelset—is optimized for precision handling and race-level performance. The G3 Complete redefines modern gravel with the perfect mix of stiffness, stability, and comfort.

- Pro-Level Electronic Shifting: Shimano GRX Di2 RX825 1×12
- Integrated Winspace one-piece carbon handlebar and aero seatpost
- Lún Gryper 35/45 mm Full Carbon Disc Brake Wheelset with Carbon Spokes and 700×40C tires
- Engineered for racing precision and pro-level stiffness
- Delivers elite gravel performance with road-like responsiveness



DESIGN PHILOSOPHY



### AERO PERFORMANCE

Fully Internal Cable Routing—Sleek lines, reduced drag, pure speed.

Wind-Tuned Frame Geometry—Every tube shaped to slice through the air.

Integrated Thru-Axle & Aero Seatpost—Closed axle system with a sleek aero tail for maximum efficiency.

### GRAVEL CAPABILITY


Up to 50C Tire Clearance—Unleash confidence on any terrain.

50T Chainring—Power through flats, dominate descents.



GEOMETRY

G3  
GRAVEL

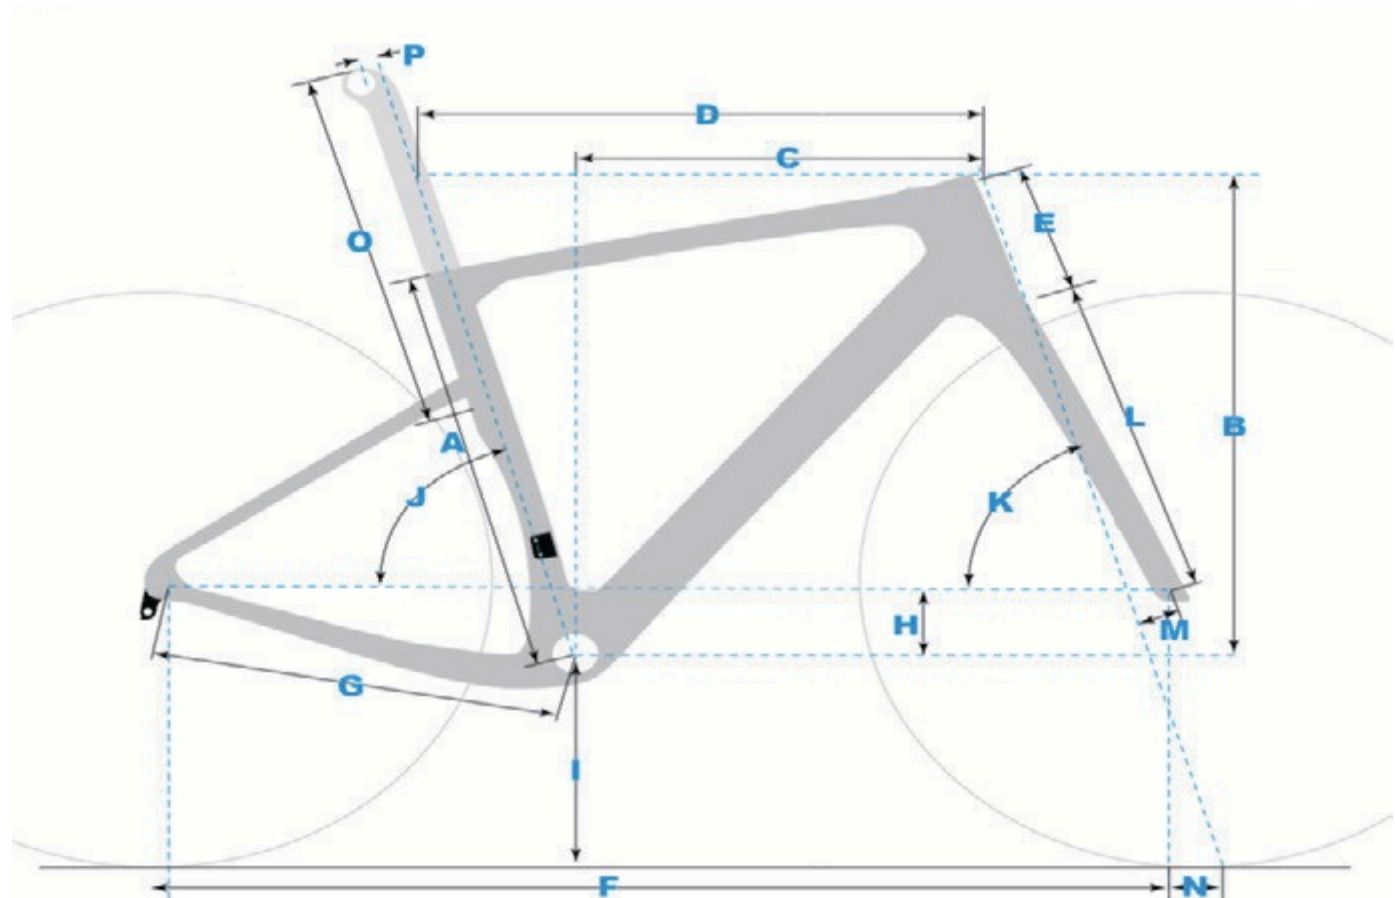

		XS	S	M	L	XL
A	Seat Tube Length	440	460	480	510	540
B	Stack	539	551	568	582	601
C	Reach	363	370	377	388	399
D	Top Tube Length	523	533	545	560	577
E	Head Tube Length	120	130	145	160	180
F	Wheelbase	1018	1024	1029	1045	1063
G	Chainstay Length	430	430	430	430	430
H	BB Drop	75	75	75	75	75
I	BB Height	286	286	286	286	286
J	Seat Tube Angle	73.5°	73.5°	73.5°	73.5°	73.5°
K	Head Tube Angle	69.5°	70°	70.5°	70.5°	70.5°
L	Fork Length	395	395	395	395	395
M	Fork Rake	54	54	51	51	51
N	Trail (45C)	72.7	69.6	69.5	69.5	69.5
O	Seatpost Length	320	320	360	360	360
P	Seatpost Setback	0	0	15	15	15
Q	Standover Height	756	773	790	815	838
	Tire	700C*50	700C*50	700C*50	700C*50	700C*50
	STR	1.48	1.49	1.51	1.50	1.51
	Recommended Height CM	155~163	163~171	171~179	179~186	186~193

Selection of frame size is based on the measurement of the actual height of the span, height is supplemented, height is for reference only, it is recommended to collect FITTING data in order to make an accurate choice!

1X:42T 2X:50-34T 700C\*50 650B:\*2"